


Specimen holder 250kN for hydraulic grips

**Specimen holder 250kN with protective visor
for threaded and shoulder specimens, screws and nuts**



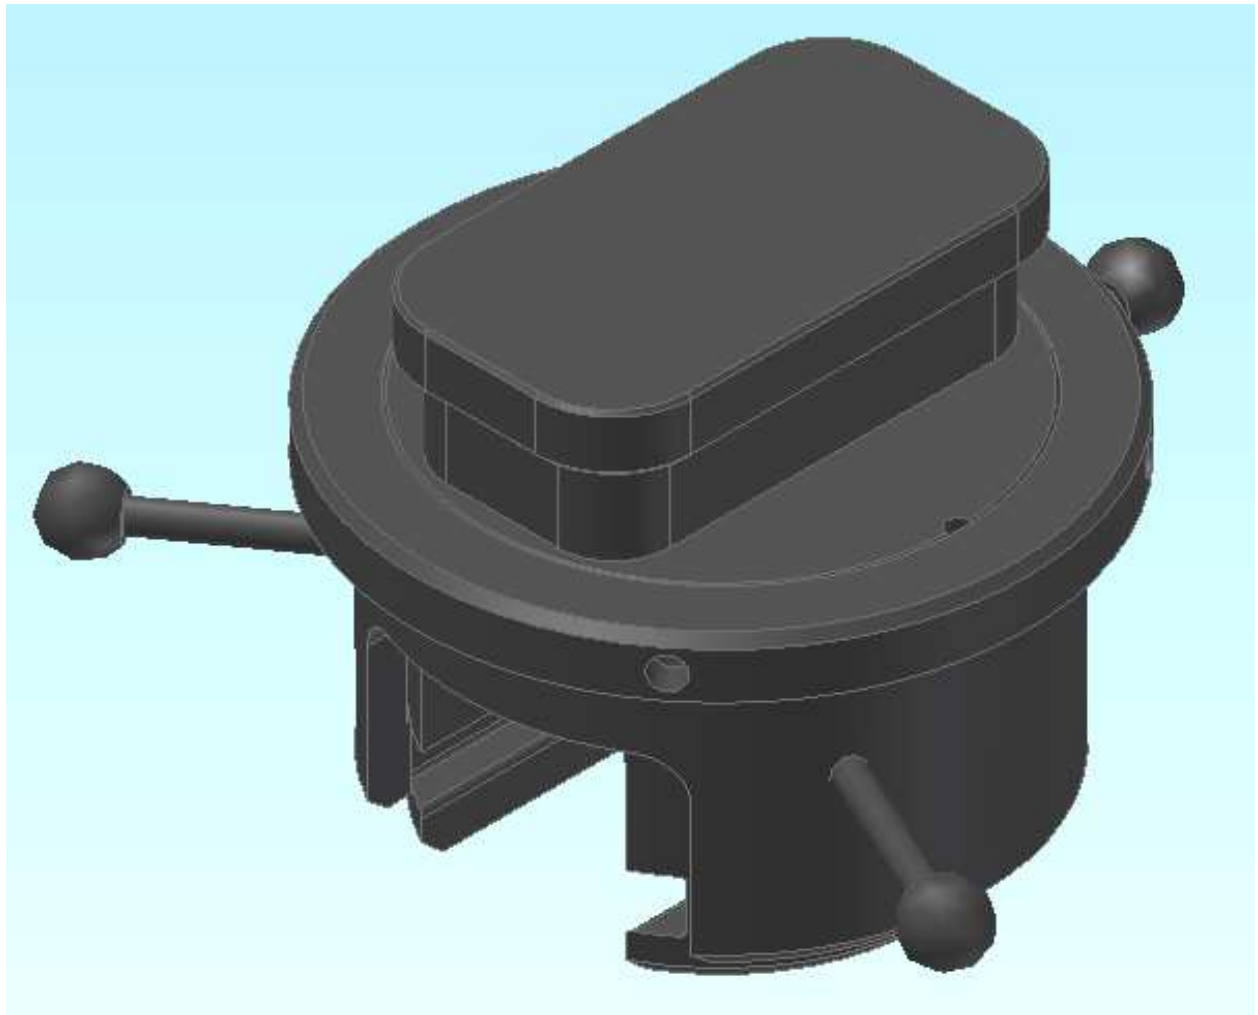

Order number	14-074-007
Application	Tensile testing of Thread-, Shoulder-, Screw-Specimen
For tests according to	Universal
Capacity / load direction	250kN / tension
Temperature range	Room temperature
Specimen dimensions / properties	Depending on specimen clamping plates
Specimen material	Threaded, shoulder and screw specimens, rods, profiles, ribbons
Connection / machine type	Insertion for hydraulic grip 250.20 or 250.21 / universal
Dimensions / design	Height 140mm, width 260mm, depth 260mm / bronzed
Weight	12kg per clamp
Included in delivery	1 pair of specimen holders without specimen clamping plates
Necessary accessories (can be ordered optionally)	Specimen clamping plate for threaded specimens: M6, M8, M10, M12, M14, M16, M18, M20, M22, M24, M27, M30 according to DIN 50125 (for metrical standard threads) order no.: 14-074-0.. and 14-074-1.. Specimen clamping plate for screw testing: d0=8mm, d0=10mm, d0=12mm, d0=14mm, d0=16mm, d0=18mm, d0=20mm, d0=22mm, d0=24mm, d0=27mm, d0=30mm (for metrical standard screws) order no.: 14-074-2.. Specimen clamping plate for shoulder specimens: 4/9, 5/12, 6/12, 8/15, 10/17, 12/22, 15/26, 17/30, 20/35, 22/38, 24/40, 30/48 (for standard shoulder dimensions) order no.: 14-074-3.. Specimen clamping plate for angular tensile specimens 4°: D=8mm, D=10mm, D=12mm, D=14mm, D=16mm, D=18mm, D=20mm, D=22mm, D=24mm, D=27mm, D=30mm, order no.: 14-074-5.. Specimen clamping plate for angular tensile specimens 6°: D=8mm, D=10mm, D=12mm, D=14mm, D=16mm, D=18mm, D=20mm, D=22mm, D=24mm, D=27mm, D=30mm, order no.: 14-074-5.. Specimen clamping plate for angular tensile specimens 10°: D=8mm, D=10mm, D=12mm, D=14mm, D=16mm, D=18mm, D=20mm, D=22mm, D=24mm, D=27mm, D=30mm, order no.: 14-074-5.. Spacer 17/30 for screw testing: Available for standard screws: M4, M5, M6, M8, M10 Spacer 22/38 for screw testing: Available for standard screws: M12, M14, M16 Spacer 30/48 for screw testing: Available for standard screws: M18, M20, M22 Order no.: 14-074-7.. Connecting nut 17/30 for screw testing: Available for standard screws: M4, M5, M6, M8, M10 Connecting nut 22/38 for screw testing: Available for standard screws: M12, M14, M16 Connecting nut 30/48 for screw testing: Available for standard screws: M18, M20, M22 Order no.: 14-074-9..